




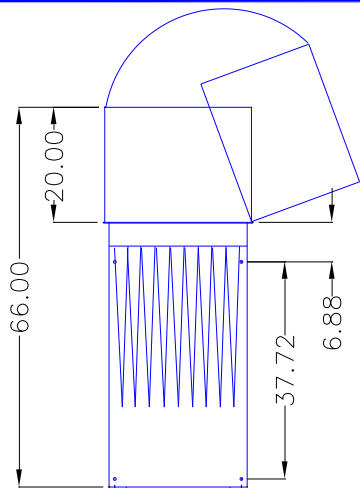

TOP VIEW

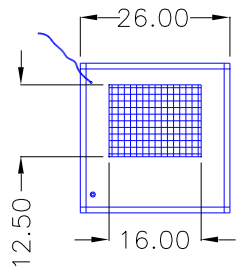

OUTLET VIEW

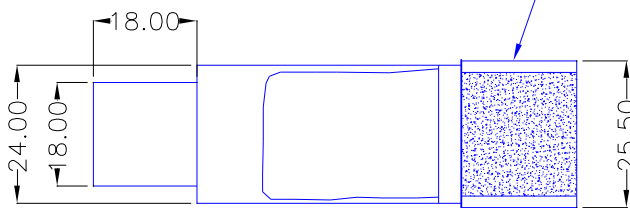

SIDE VIEW

OPTIONAL SILENCER
AVAILABLE STRAIGHT OR
RIGHT ANGLE DISCHARGE

HINGED REDUCED
MAINTENANCE
PREFILTER
PLENUM

OPTIONAL
PRESSURE
GAGE KIT

SPECIFICATIONS:

CONSTRUCTION: 18 Gauge painted steel cabinet with a hinged, quick release reduced maintenance prefilter plenum. Includes a direct drive 10"x10" blower w/4-way adjustable airfoil blade exhaust grille, a totally enclosed motor, and a 6' power cord and plug.

WEIGHT: 170 lbs.

AIRFLOW: 2500 CFM (HI) / 1400 CFM (LOW)

ELECTRICAL: ☐ 3/4 HP 115/1/60, 9.4 amps. 2 speed, std.
☐ 3/4 HP 208-230/1/60, 3.9 amps, opt. (With switch and cord, no plug).

NOISE: 68 dBA
62 dBA with silencer (right angle discharge)

PREFILTERS: ☐ (1) 2" polyester, 10ft.²

☐ (1) Auto roll, opt.

☐ (1) 4" pleat, opt.

MAIN FILTERS: ☐ (1) 65% bag, 66 ft.², std.


☐ (1) 95% bag, opt.

☐ (1) Easy clean, opt.


OTHER OPTIONS: ☐ Pressure gauge kit indicates filter changes
☐ Silencer

* This unit can be flipped over for left to right airflow.

* AFS FILTER EFFICIENCIES BASED ON ASHRAE 52-76 TEST METHOD
ALL FLOWS STANDARD AIR AND FILTERS UNLESS OTHERWISE INDICATED

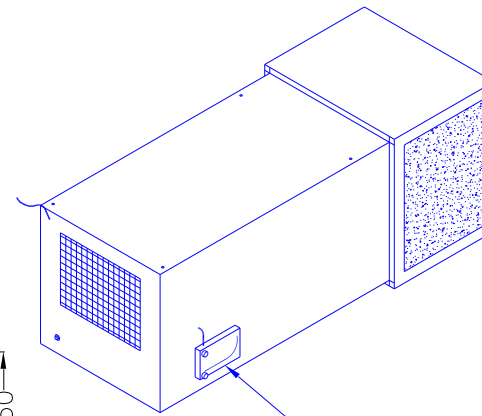

PERFORMANCE CURVES

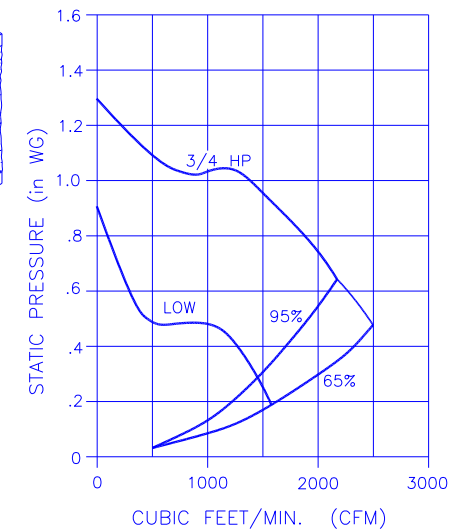

NOTES:

Items designated as ☒ are included in this proposal

THE DEVICE DEPICTED AND DESCRIBED
HEREON EMBODIES PROPRIETARY
INFORMATION OWNED BY AIRFLOW SYSTEMS,
INC. ALL DESIGN, MANUFACTURING,
REPRODUCTION, SALES, AND PATENT RIGHTS
REGARDING THIS DEVICE OR DRAWING ARE
RESERVED EXCEPT WHERE EXPLICIT RIGHT
IS GRANTED IN WRITING.

Airflow
SYSTEMS INC.
11221 Pagemill Road
Dallas, Tx 75243-8314
(214) 503-8008
Fax (214) 503-9596
E-MAIL: info@airflowsystems.com

DRAWN BY
JRS
DATE
9-27-16
SCALE

TITLE
MODEL F70-R

DRAWING NO.: F70RSPEC (70-4769/1)